



### ORDERING CODE

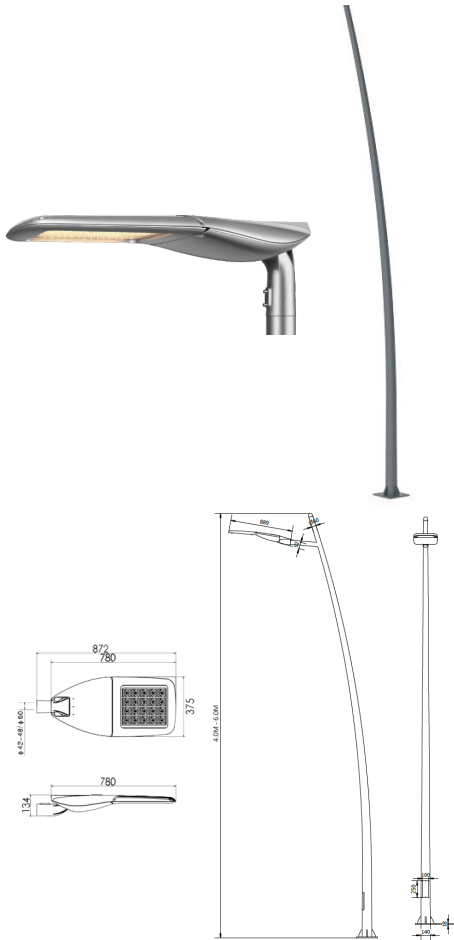

### Specification

- Fixture Material : Die-cast ALuminum
- Pole Material : Aluminum Steel
- Fixture Finish : Powder Coated
- Diffuser : Extra-clear Transparent Glass
- LED Chip : CREE
- Surge Protection : Up to 65V- L-N/8KV L/N-Frame
- Lifespan : 50,000 Hrs
- CRI : >70 / >80 / >90
- Input Voltage : 220V / 240V, 50/60Hz
- Operating Temperatur : -35°C to +55°C
- Warranty : 5 Years against manufacturing defects

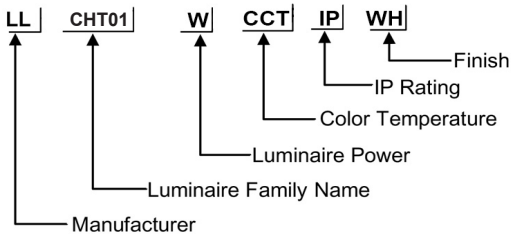

Power (W)	Lumen Lm	IP Rating	Beam Angle	Available CCT
25W	3125Lm	IP66	T I / T II / T III / T IV / T V	2700K
30W	3750Lm			3000K
45W	5625Lm			4000K
55W	6875Lm			6000K
75W	9375Lm			

