

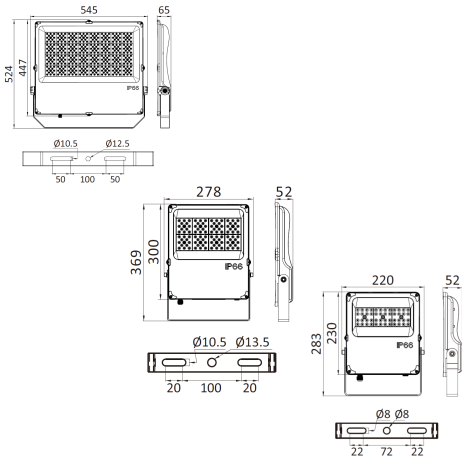


ORDERING CODE



Specification

- Fixture Material** : Aluminum, Glass, PC
- Fixture Finish** : Powder Coated
- Diffuser** : Tempered Glass
- Cowl Material** : Die Cast Aluminium
- LED Chip** : CREE
- Binning** : 3 step MacAdam
- Wiring** : 3x1.0 50cm cable with antisiphon plug
- Lifespan** : 100.000 Hrs
- CRI** : >80
- Input Voltage** : 100-277 vac, 50/60Hz or 220-240V AC, 50/60Hz
- Operating Temperature** : -30°C to +55°C
- Warranty** : 5 Years against manufacturing defects

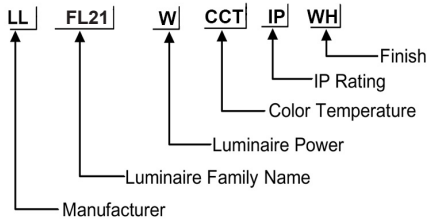

Power (W)	Lumen Lm	IP Rating	Beam Angle	Available CCT
50W	75000Lm	66	30°/60°/90°/120°/30°x90°	2700K
80W	12000Lm			3000K
100W	15000Lm			4000K
150W	22500Lm			6000K
200W	30000Lm			
240W	36000Lm			
300W	45000Lm			

