




ORDERING CODE



Specification

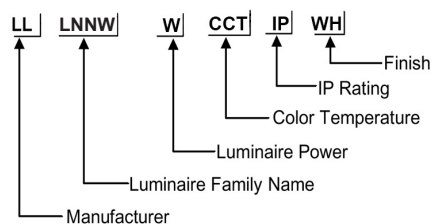

300 / 500 / 1000 / 1200 mm

| | |
|-----------------------|---|
| Fixture Material | : Aluminum + Anti-UV acrylic cover |
| Fixture Finish | : Powder Coated |
| Diffuser | : Opal PMMA |
| LED Chip | : CREE |
| Binning | : 3 Step MacAdam |
| Lifespan | : 50,000 Hrs |
| CRI | : >80 |
| Input Voltage | : 220 - 240 V, 50/60Hz |
| Operating Temperature | : -35°C to +55°C |
| Warranty | : 5 Years against manufacturing defects |



| Power (W) | Lumen Lm | IP Rating | Beam Angle | Available CCT |
|-----------|----------|-----------|--------------------|---------------|
| 12 W | 1200Lm | IP67 | 5°/20°/45°/60°/90° | 2700K |
| 16 W | 1600Lm | | | 3000K |
| 24 W | 2400Lm | | | 4000K |
| 36 W | 3600Lm | | | 6000K |

